

5,1-62,3
m³/min

90-315
kW

7,5-8,5
10-13
bar



General Features

- IE4 efficiency-class electric motors
- Two-stage screw block
- Variable and fixed speed motor power options
- Water cooling and heat recovery (optional)
- Operating with low noise level




Screw Block

- Two-stage screw block produces energy efficiency by up to 10%
- Higher flow rate by up to 10% comparing to single stage
- Direct coupled
- Reduced internal losses
- Thanks to low compression rate, low axial and compression forces
- Thanks to low rotor speeds, a long service life
- With two-stage compression near isothermal compression
- Reduced axial and compression forces resulting in longer screw and bearing service life

Electric Motor

- IE4 efficiency-class electric motors
- B-class temperature increase
- Continuous operating feature

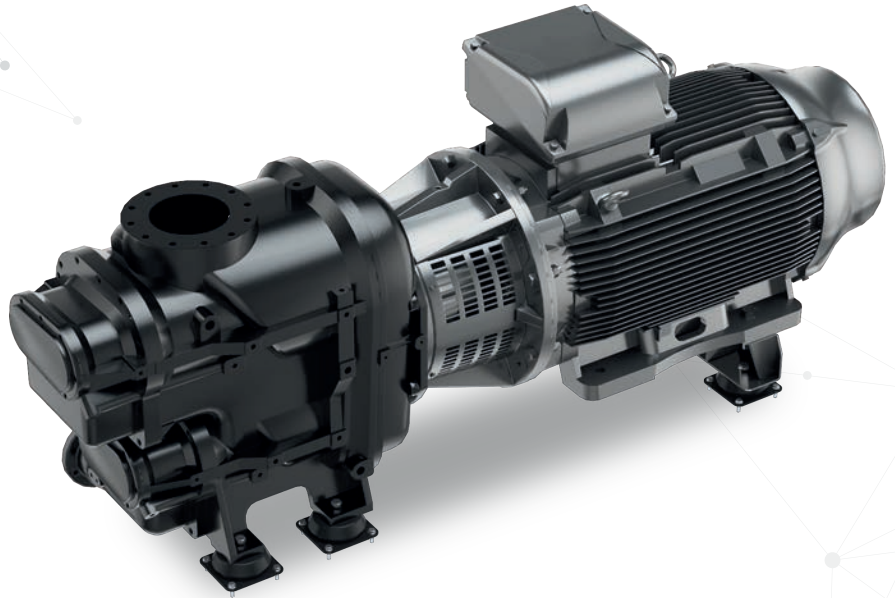


Intake Chamber

- Intake in cold air directly from the environment contributes to energy efficiency by up to 2%
- High energy efficiency with minimized intake pressure losses
- Improved acoustic designs result in low noise levels

Cooling System

- High cooling efficiency in compact air and oil heat exchangers
- Suitable design for operating up to 45°C
- Low noise level with low speed radial fans
- Energy efficiency with optimum oil temperature thanks to VSD-controlled radial fans

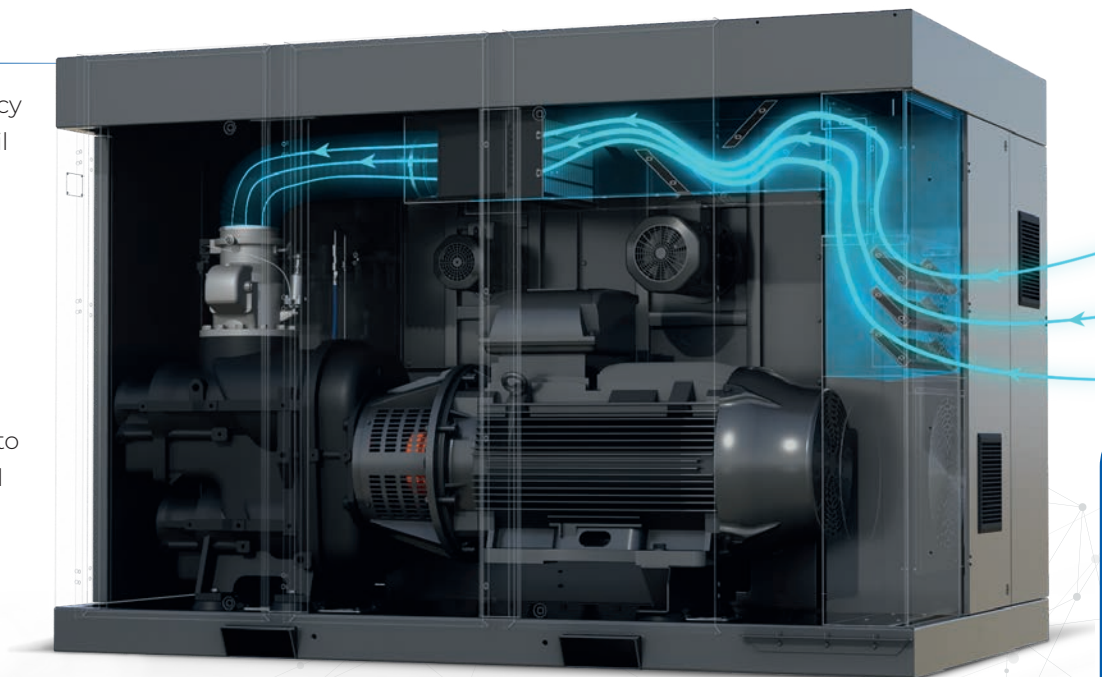

Model	Pressure		Capacity*		Motor kW/HP	Connection Size	Dimensions (mm)			Weight kg	Noise dB (A)
	bar	psi	m ³ /min	cfm			Length	Width	Height		
IMPETUS 90	7,5	110	18,42	650	90/125	DN65	2775	1805	1926	3660	75
	8,5	125	14,72	520							
	10	145	14,65	517							
	13	190	13,65	482							
IMPETUS 110	7,5	110	23,89	844	110/150	DN65	2775	1805	1926	4000	75
	8,5	125	21,76	768							
	10	145	18,49	653							
	13	190	14,57	515							
IMPETUS 132	7,5	110	26,25	927	132/180	DN80	2950	1950	2000	4500	75
	8,5	125	26,07	921							
	10	145	23,62	834							
	13	190	21,82	771							
IMPETUS 160	7,5	110	31,72	1120	160/220	DN80	2950	1950	2000	5000	76
	8,5	125	31,29	1105							
	10	145	25,78	910							
	13	190	25,60	904							
IMPETUS 200	7,5	110	43,49	1536	200/270	DN 100	3500	2250	2350	6220	78
	8,5	125	40,70	1437							
	10	145	34,77	1228							
	13	190	30,62	1081							
IMPETUS 250	7,5	110	53,40	1886	250/340	DN 100	3500	2250	2350	9120	79
	8,5	125	50,49	1783							
	10	145	42,15	1524							
	13	190	40,53	1431							
IMPETUS 315	7,5	110	62,67	2213	315/430	DN 100	3500	2250	2350	9400	80
	8,5	125	56,95	2011							
	10	145	55,18	1949							
	13	190	44,13	1558							

- Unit performances measured in reference conditions which are 1 bar absolute air Pressure, 0% relative humidity, 20°C inlet air temperature, 71°C thermostatic valve set temperature and use of Smartoil.

- Hertz reserves its rights to make changes in its products and specifications without prior notice.

* Refers to free air delivery measured according to ISO 1217:2009, Annex E standard.

Model	Pressure		Capacity*				Motor Power	Connection Size	Dimensions (mm)			Weight	Noise
			Minimum		Maximum				Length	Width	Height		
	bar	psi	m ³ /min	cfm	m ³ /min	cfm	kg	dB (A)					
IMPETUS VSD 90	7,5	110	5,38	189	18,44	651	90/125	DN65	2775	1805	1926	3835	75
	8,5	125	5,36	189	17,33	612							
	10	145	5,24	185	15,87	560							
	13	190	5,15	181	13,66	482							
IMPETUS VSD 110	7,5	110	7,08	250	23,12	816	110/150	DN65	2775	1805	1926	4200	75
	8,5	125	6,9	243	21,68	766							
	10	145	6,88	242	20,2	713							
	13	190	6,82	240	17,25	609							
IMPETUS VSD 132	7,5	110	7,94	280	27,88	985	132/180	DN80	2950	1950	2000	4675	75
	8,5	125	7,9	278	26,4	932							
	10	145	7,59	268	24,51	866							
	13	190	7,5	264	21,35	754							
IMPETUS VSD 160	7,5	110	8,5	299	32,45	1146	160/220	DN80	2950	1950	2000	5300	76
	8,5	125	8,25	291	30	1059							
	10	145	8,39	296	28	989							
	13	190	9,14	322	24,98	882							
IMPETUS VSD 200	7,5	110	11,8	416	42,86	1514	200/270	DN 100	3500	2250	2350	6550	78
	8,5	125	11,8	416	39,94	1410							
	10	145	11,6	410	37,01	1307							
	13	190	11,4	402	30,54	1079							
IMPETUS VSD 250	7,5	110	17,34	612	52,41	1851	250/340	DN 100	3500	2250	2350	9400	79
	8,5	125	17,12	604	49,13	1735							
	10	145	16,76	591	45,86	1620							
	13	190	17,33	612	38,84	1372							
IMPETUS VSD 315	7,5	110	16,86	595	62,01	2190	315/430	DN 100	3500	2250	2350	9680	80
	8,5	125	16,85	595	59,31	2095							
	10	145	16,81	593	55,24	1951							
	13	190	30,33	1071	45,96	1623							

- Unit performances measured in reference conditions which are 1 bar absolute air Pressure, 0% relative humidity, 20°C inlet air temperature, 71°C thermostatic valve set temperature and use of Smartoil.
- Hertz reserves its rights to make changes in its products and specifications without prior notice.
- * Refers to free air delivery measured according to ISO 1217:2009, Annex E standard.